

**For general applications and moderately corrosive chemicals. NAP and NAR types have a notched mechanical drive system.**



- Monobloc for rapid installation
- In permanent contact with the shaft with avoid all movement
- Type NAR incorporates a reinforcing ring which assures performance
- Difficult to clog
- The suppleness of the membrane compensates for play, vibration.
- **Temperature:** -40 °C to 180 °C (depending on material choice)
- **Pressure:** up to 15 bar (NAP) up to 20 bar (NAR)
- **Max Speed:** 15 m/s
- **Shaft size:** 10 to 70 mm

Performances shown above are minimum values for standard conditions of use; consult our technical experts for validation.

## COEFFICIENT OF CORRECTION OF RESISTANCE TO PRESSURE AND SPEED

	SELECTION FACTOR	COEFFICIENT
<b>Nature of the fluid to be sealed</b>	Petrol/gasoline, Kerosene	× 1
	Water, Aqueous solution	
	Flashing hydrocarbons	
<b>Friction faces materials</b>	Carbon vs. silicon carbide	× 1
	Carbone vs. alumina	
	Silicon carbide vs. silicon carbide	× 0,6
<b>Fluid temperature</b>	T < 80° C	× 0,8
	80° C < T < 120° C	
	120° C < T < 180° C	
<b>Speed</b>	< 3 000 R.P.M	× 1
	> 3 000 R.P.M	

## POSSIBILITY OF ASSEMBLY




**Type NAP**



**Type NAR**

## DIMENSIONS OF NAP AND NAR SEALS AND SEAT IN (MM)

SHAFT DIAMETER	SEAL HEAD		SEAT
	External diameter	Working length	Designation
10	20	26	10- 21 - 5
12	22	28	12- 23- 6
14	24	28	14- 25 - 6
15	26	28	15 - 27 - 6
16	26	28	16 - 27 - 6
17	32	31	17 - 33 - 6
18	32	31	18 - 33 - 6
20	34	31	20 - 35 - 6
22	36	31	22 - 37 - 6
24	38	33	24 - 39 - 6
25	39	34	25 - 40 - 6
28	42	34	28 - 43 - 6
30	44	34	30 - 45 - 7
32	46	37	32 - 48 - 7
35	49	39	35 - 50 - 8
38	54	43	38 - 56 - 8
40	56	43	40 - 58 - 8
45	61	45	45 - 63 - 8
48	64	46	48 - 66 - 10
50	66	47	50 - 70 - 10
55	71	48	55 - 75 - 10
60	80	54	60 - 80 - 12
65	85	54	65 - 85 - 12
70	90	61	70 - 92 - 12

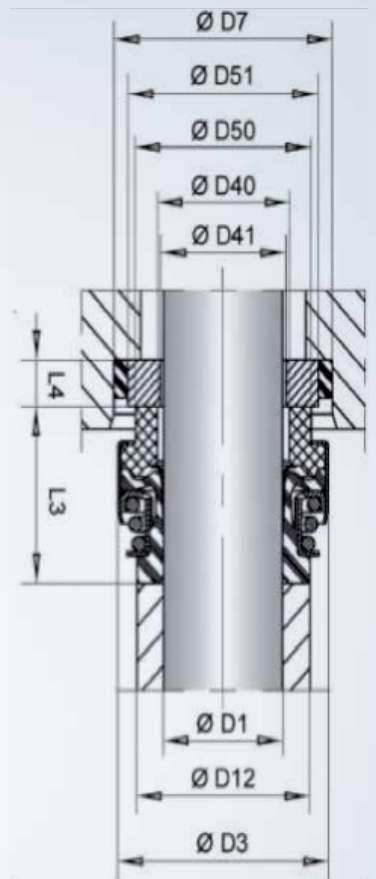

## DESIGNATION OF MATERIALS

COMPONENT DESIGNATION	MATERIALS
Friction washer	Molded resin carbon
	Carbographite
	Carbon impregnated with resin
	Silicon carbide
	Tungsten carbide (option)
	PTFE charged glass (optional)
Elastomer parts	Nitrile
	Ethylene propylene
	FPM
Metal part and spring	Stainless steel
Seat	Porous silicon carbide
	Stainless steel
	Silicon carbide
	Alumina (99% optional)
	Tungsten carbide (option)



For other materials, contact us.